


CURVA A SALDARE 90° SP. 2


NORMATIVA: EN 10253-3 o EN 10253-4

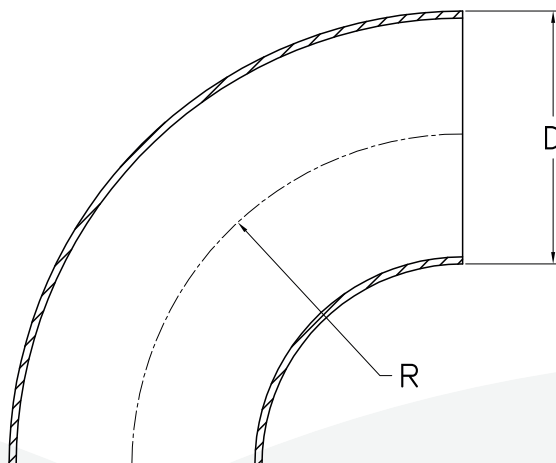

DN	D mm	R (RAGGIO) mm
8	13.7	20.0
10	17.2	25.0
-	20.0	30.0
15	21.3	27.0
-	25	37.0
20	26.9	28.0
-	30.0	45.0
25	33.7	38.0
-	38.0	55.0
-	40.0	60.0
32	42.4	47.0
-	44.5	65.0
40	48.3	57.0
-	50.0	71.0
-	52.0	78.0
-	54.0	80.0
-	57.0	85.5
50	60.3	76.0
-	70.0	92.0
65	76.1	95.0
-	80.0	120.0
-	84.0	125.0
80	88.9	114.0
90	101.6	133.5

CURVA A SALDARE 90° SP. 2

NORMATIVA: EN 10253-3 o EN 10253-4

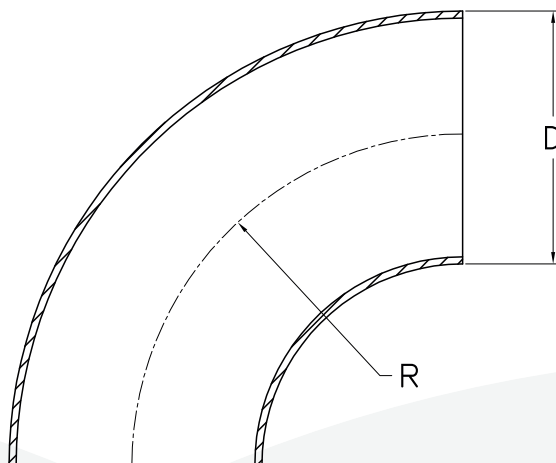

DN	D mm	R (RAGGIO) mm
-	104.0	155.0
-	108.0	142.5
100	114.3	152.0
-	129.0	190.0
125	139.7	190.0
-	154.0	225.0
150	168.3	229.0
-	204.0	300.0
200	219.1	305.0
-	254.0	375.0
250	273.0	381.0