


CURVA A SALDARE 90° SP. 3

NORMATIVA: EN 10253-3 o EN 10253-4

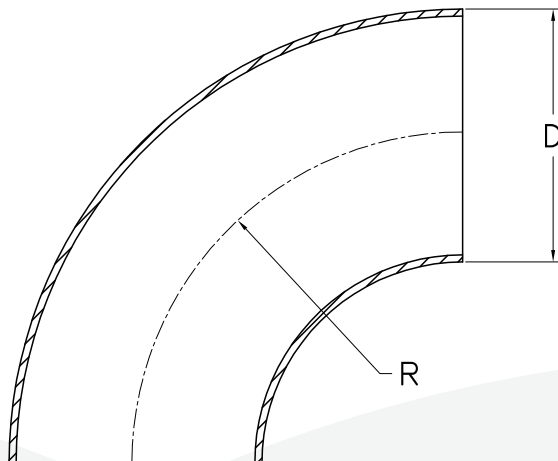

DN	D mm	R (RAGGIO) mm
15	21.3	27.0
20	26.9	28.0
25	33.7	38.0
32	42.4	47.0
40	48.3	57.0
-	57.0	85.5
50	60.3	76.0
65	76.1	95.0
80	88.9	114.0
90	101.6	133.5
-	108.0	142.5
100	114.3	152.0
-	129.0	190.0
125	139.7	190.0
-	154.0	225.0
150	168.3	229.0
-	206.0	300.0
200	219.1	305.0
-	254.0	375.0
250	273.0	381.0
300	323.9	457.0
350	355.6	533.0
400	406.4	610.0
500	508.0	762.0