


FLANGIA ASME B16.5 ASTM A182 300 LBS WN

RICAVATO DA: FORGIATO

NORMATIVA: ASME B16.5

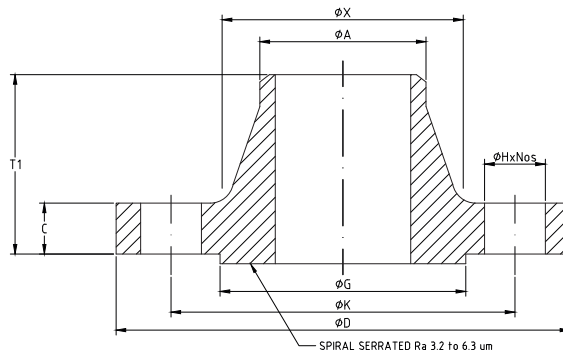

MISURA	DIAMETRO ESTERNO D	TOL	PASSO DIAMETRO CIRCOLARE K	TOL	DIAMETRO SUPERF. SOLLEVATA G	TOL	SPESSORE C	TOL	LUNGHEZZA TOTALE T1	TOL	FORI x N. H x NOS	DIAMETRO SMUSSATURA A	TOL	DIAMETRO MOZZO X	TOL
1/2"	95		60.5		35.1		9.7		46.0		15.9x4	21.3		30.2	
3/4"	117		69.9		42.9		11.2		50.8		15.9x4	26.7		38.1	
1"	124		79.2		50.8		12.7		53.8		15.9x4	33.5		49.3	
1"1/4	133		88.9		63.5		14.2		55.6		15.9x4	42.4		58.7	
1"1/2	155		98.6		73.2		15.7		60.5	+1.5	15.9x4	48.3		65.0	
2"	165		120.7		91.9		17.5		62.0	-1.5	19.1x4	60.5	+2.3 -0.8	77.7	
2"1/2	191		139.7		104.6		20.6		68.3		19.1x4	73.2		90.4	
3"	210		152.4		127.0		22.4		68.3		19.1x4	88.9		108.0	
3"1/2	229		177.8		139.7		22.4	+3.0	69.9		19.1x8	101.6		122.2	
4"	254	+1.5	190.5	+1.5	157.2	+0.8	22.4	-0.0	74.4		19.1x8	114.3		134.9	+1.5
5"	279	-1.5	215.9	-1.5	185.7	-0.8	22.4		87.4		22.2x8	141.2		163.6	-1.0
6"	318		241.3		215.9		23.9		87.4	+1.5	22.2x8	168.4		192.0	
8"	381		298.5		269.7		26.9		100.1	-3.0	22.2x8	219.2		246.1	
10"	445		362.0		323.9		28.4		100.1		25.4x12	273.1		304.8	
12"	521		431.8		381.0		30.2		112.8		25.4x12	323.9		365.3	
14"	584		476.3		412.8		33.3		125.5		28.6x12	355.6	+4.1 -0.8	400.1	
16"	648		539.8		469.9		35.1		125.5	+3.0	28.6x16	406.4		457.2	
18"	711		577.9		533.4		38.1		138.2	-4.6	31.8x16	457.2		505.0	
20"	775		635.0		584.2		41.1	+4.8	142.7		31.8x20	508.0		558.8	
24"	914		749.3		692.2		46.0	-0.0	150.9		34.9x20	609.6		663.4	