


CURVA MANDRINARE 45° LUCIDA ESTERNA SATINATA INTERNA

NORMATIVA: DIN 11852

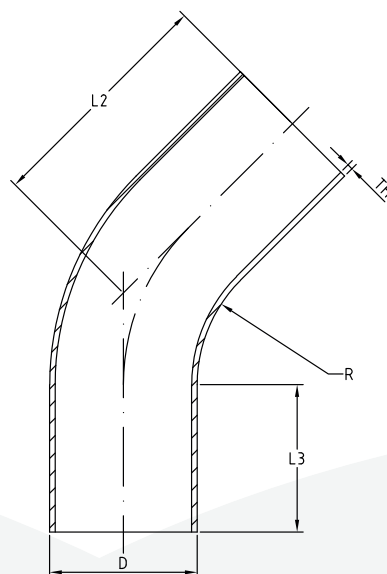

DN	D mm	TH mm	R mm	L2 mm	L3 mm
10	12.0	1.5	26	35.8	25
15	18.0	1.5	35	39.5	25
20	22.0	1.5	40	41.6	25
25	28.0	1.5	50	60.7	40
32	34.0	1.5	55	62.8	40
40	40.0	1.5	60	64.9	40
50	52.0	1.5	70	69.0	40
60	60.0	2	75	70.5	40
65	70.0	2	80	73.1	40
80	85.0	2	90	92.3	55
100	101.6	2	100	96.4	55
100/104	104.0	2	100	96.4	55