


RIDUZIONE CONCENTRICA A MANDRINARE

LUCIDA ESTERNA SATINATA INTERNA

NORMATIVA: DIN 11852

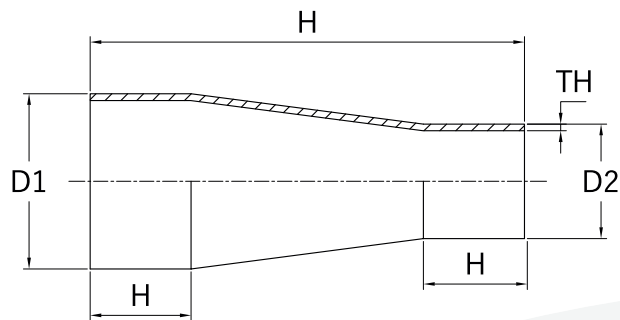


DN	D1 mm	D2 mm	H mm	L mm	TH mm
20/15	22	18	60	18	1.5
25/15	28	18	60	20	1.5
25/20	28	22	60	20	1.5
32/20	34	22	80	30	1.5
32/25	34	28	80	30	1.5
40/20	40	22	102	35	1.5
40/25	40	28	102	35	1.5
40/32	40	34	88	35	1.5
50/25	52	28	115	40	1.5
50/32	52	34	129	40	1.5
50/40	52	40	113	40	1.5
60/32	60	34	125	40	2
60/40	60	40	117	40	2
60/50	60	52	110	40	2
65/25	70	28	125	40	2
65/32	70	34	125	40	2
65/40	70	40	120	40	2
65/50	70	52	130	40	2
65/60	70	60	130	40	2
80/40	85	40	140	40	2
80/50	85	52	125	40	2
80/60	85	60	120	40	2
80/65	85	70	120	40	2

RIDUZIONE CONCENTRICA A MANDRINARE

LUCIDA ESTERNA SATINATA INTERNA

NORMATIVA: DIN 11852

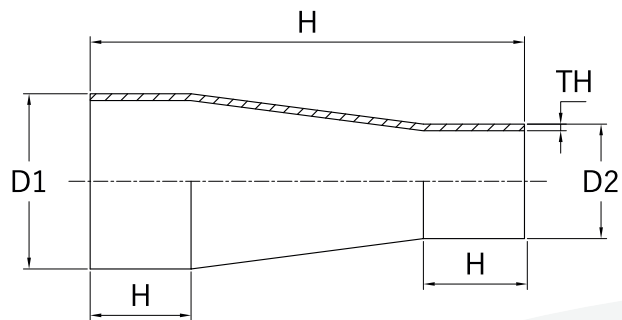

DN	D1 mm	D2 mm	H mm	L mm	TH mm
100/50	101.6	52	160	40	2
100/65	101.6	70	127	40	2
100/80	101.6	85	120	40	2