


VALVOLA A SFERA 2PZ FF



NORMATIVA: BSP 150 LBS

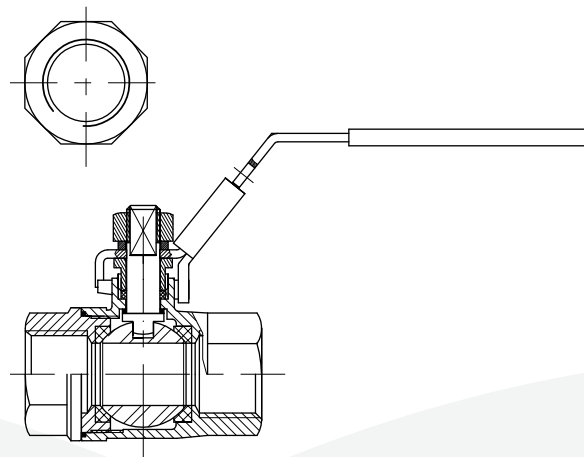

DN	DN pollici	D1 mm	L mm	H mm	W mm	S mm	S1 mm	X mm	BL
8	1/4"	11.6	50	48	98	16.5	10.2	5	M8
10	3/8"	12.5	50	48	98	16.5	10.2	5	M8
15	1/2"	15.0	60	52	98	16.5	10.2	5	M8
20	3/4"	20.0	65	61	120	20.0	13.5	6	M8
25	1"	25.0	80	65	154	23.5	16.0	7	M10
32	1"1/4	32.0	92	79	154	23.5	16.0	7	M10
40	1"1/2	38.0	105	83	184	25.5	17.0	8	M12
50	2"	50.0	125	97	184	25.5	17.0	8	M12
65	2"1/2	65.0	156	129	245	41.0	29.5	12	M16
80	3"	76.0	183	138	245	41.0	29.5	12	M16

VALVOLA A SFERA 2PZ FF

NORMATIVA: BSP 150 LBS

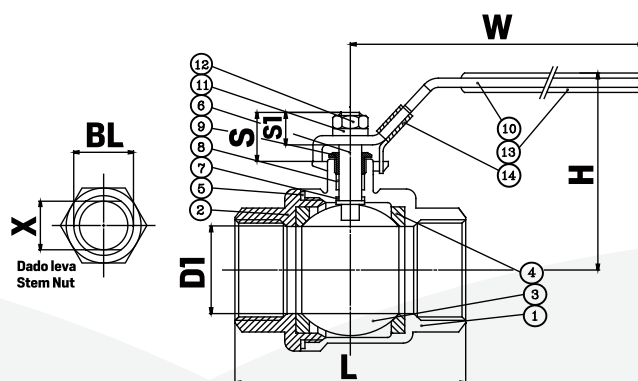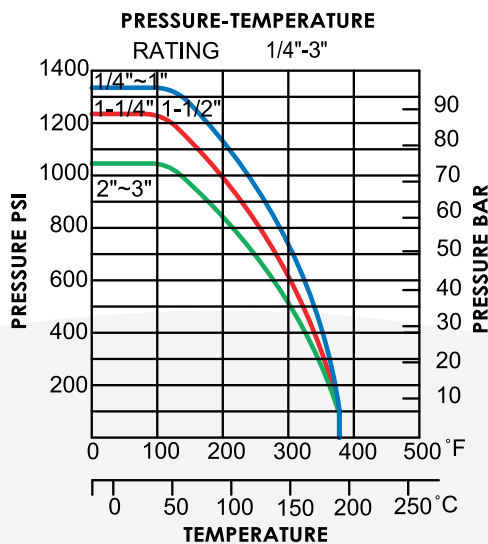

POSIZIONE	PARTICOLARE	MATERIALE
1	Corpo	AISI 316 - 1.4408
2	Tappo	AISI 316 - 1.4408
3	Sfera	AISI 316 - 1.4408
4	Anello di sede	PTFE
5	Guarnizione	PTFE
6	Stelo	AISI 316 - 1.4401
7	Rondella di spinta	PTFE
8	Tenuta stelo	PTFE
9	Dado premistoppa	AISI 304 - 1.4301
10	Leva	AISI 304 - 1.4301
11	Rondella "grower"	AISI 304 - 1.4301
12	Dado leva	AISI 304 - 1.4301
13	Copertura leva	PVC
14	Lucchetto	AISI 304 - 1.4301