


FLANGIA ASME B16.5 ASTM A182 150 LBS S.W.

RICAVATO DA: FORGIATO

NORMATIVA: ASME B16.5

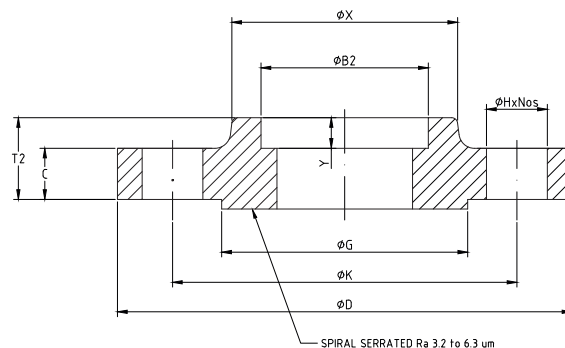

MISURA	DIAMETRO ESTERNO		PASSO DIAMETRO CIRCOLARE		DIAMETRO SUPERF. SOLLEVATA		SPESSORE		LUNGHEZZA TOTALE		FORI x N.	DIAMETRO INTERNO		DIAMETRO MOZZO		SWRF PROFONDO	
	D	TOL	K	TOL	G	TOL	C	TOL	T2	TOL		B2	TOL	X	TOL	X	TOL
1/2"	88.9		60.5		35.1		9.7		14.2		15.9x4	22.4		30.2		9.7	
3/4"	98.6		69.9		42.9		11.2		14.2		15.9x4	27.7		38.1		11.2	
1"	108.0		79.2		50.8		12.7		15.7		15.9x4	34.5		49.3		12.7	
1"1/4	117.3	+1.5	88.9	+1.5	63.5	+0.8	14.2	+3.0	19.1	+1.5	15.9x4	43.2	+1.0	58.7	+1.5	14.2	+0.3
1"1/2	127.0	-1.5	98.6	-1.5	73.2	-0.8	15.7	-0.0	20.6	-1.5	15.9x4	49.5	-0.0	65.0	-1.0	15.7	-0.3
2"	152.4		120.7		91.9		17.5		23.9		19.1x4	62.0		77.7		17.5	
2"1/2	177.8		139.7		104.6		20.6		26.9		19.1x4	74.7		90.4		19.1	
3"	190.5		152.4		127.0		22.4		28.4		19.1x4	90.7		108.0		20.6	