


FLANGIA CIECA FORGIATA ASME B16.5 ASTM A182 300 LBS

RICAVATO DA: FORGIATO

NORMATIVA: ASME B16.5

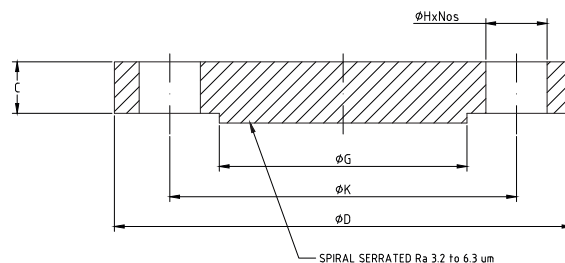

MISURA	DIAMETRO ESTERNO		PASSO DIAMETRO CIRCOLARE		DIAMETRO SUPERF. SOLLEVATA		SPESSORE		FORI x N.
	D	TOL	K	TOL	G	TOL	C	TOL	H x NOS
1/2"	95.3		66.5		35.1		12.7		15.9x4
3/4"	117.3		82.6		42.9		14.2		19.1x4
1"	124.0		88.9		50.8		15.7		19.1x4
1"1/4	133.4		98.6		63.5		17.5		19.1x4
1"1/2	155.4		114.3		73.2		19.1		22.2x4
2"	165.1		127.0		91.9		20.6		19.1x8
2"1/2	190.5		149.4		104.6		23.9		22.8x8
3"	209.6		168.1		127.0		26.9		22.8x8
3"1/2	228.6		184.2		139.7		28.4	+3.0	22.8x8
4"	254.0	+1.5	200.2	+1.5	157.2	+0.8	30.2	-0.0	22.8x8
5"	279.4	-1.5	235.0	-1.5	185.7	-0.8	33.3		22.8x8
6"	317.5		269.7		215.9		35.1		22.2x12
8"	381.0		330.2		269.7		39.6		25.4x12
10"	444.5		387.4		323.9		46.0		28.6x16
12"	520.7		450.9		381.0		49.3		31.8x16
14"	584.2		514.4		412.8		52.3		31.8x20
16"	647.7		571.5		469.9		55.6		34.9x20
18"	711.2		628.7		533.4		58.7		34.9x24
20"	774.7		685.8		584.2		62.0	+4.8	34.9x24
24"	914.4		812.8		692.2		68.3	-0.0	41.3x24