


FLANGIA ASME B16.5 ASTM A182 150 LBS S.O.

NORMATIVA: ASME B16.5

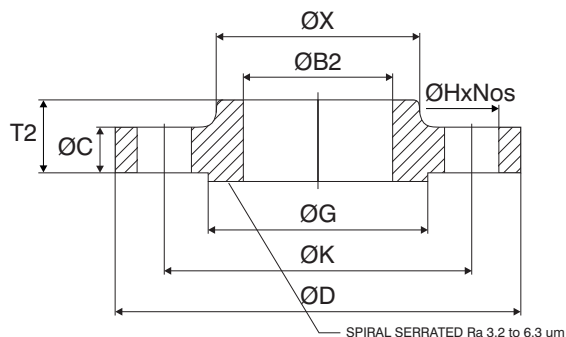

DN inch	D mm	K mm	G mm	C mm	T2 mm	HxNOS mm	B2 mm	X mm
1/2"	88.9	60.5	35.1	9.7	14.2	15.9x4	22.4	30.2
3/4"	98.6	69.9	42.9	11.2	14.2	15.9x4	27.7	38.1
1"	108	79.2	50.8	12.7	15.7	15.9x4	34.5	49.3
1"1/4	117.3	88.9	63.5	14.2	19.1	15.9x4	43.2	58.7
1"1/2	127	98.6	73.2	15.7	20.6	15.9x4	49.5	65
2"	152.4	120.7	91.9	17.5	23.9	19.1x4	62	77.7
2"1/2	177.8	139.7	104.6	20.6	26.9	19.1x4	74.7	90.4
3"	190.5	152.4	127	22.4	28.4	19.1x4	90.7	108
3"1/2	215.9	177.8	139.7	22.4	30.2	19.1x8	103.4	122.2
4"	228.6	190.5	157.2	22.4	31.8	19.1x8	116.1	134.9
5"	254	215.9	185.7	22.4	35.1	22.2x8	143.8	163.6
6"	279.4	241.3	215.9	23.9	38.1	22.2x8	170.7	192
8"	342.9	298.5	269.7	26.9	42.9	22.2x8	221.5	246.1
10"	406.4	362	323.9	28.4	47.8	25.4x12	276.4	304.8
12"	482.6	431.8	381	30.2	53.8	25.4x12	327.2	365.3
14"	533.4	476.3	412.8	33.3	55.6	28.4x12	359.2	400.1
16"	596.9	539.8	469.9	35.1	62	28.4x16	410.5	457.2
18"	635	577.9	533.4	38.1	66.5	31.8x16	461.8	505
20"	698.5	635	584.2	41.4	71.4	31.8x20	513.1	558.8
24"	812.8	749.3	692.2	46	81	34.8x20	616	663.4