


FLANGIA ASME B16.5 ASTM A182 300 LBS S.O.

NORMATIVA: ASME B16.5

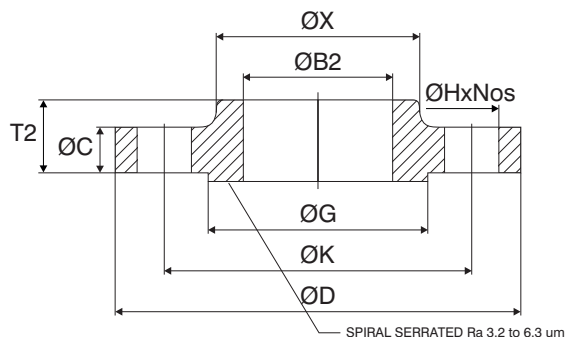

DN inch	D mm	K mm	G mm	C mm	T2 mm	HxNOS mm	B2 mm	X mm
1/2"	95.3	66.5	35.1	12.7	20.6	15.9x4	22.4	38.1
3/4"	117.3	82.6	42.9	14.2	23.9	19.1x4	27.7	47.8
1"	124	88.9	50.8	15.7	25.4	19.1x4	34.5	53.8
1"1/4	133.4	98.6	63.5	17.5	25.4	19.1x4	43.2	63.5
1"1/2	155.4	114.3	73.2	19.1	28.7	22.2x4	49.5	69.9
2"	165.1	127	91.9	20.6	31.8	19.1x8	62	84.1
2"1/2	190.5	149.4	104.6	23.9	36.6	22.2x8	74.7	100.1
3"	209.6	168.1	127	26.9	41.4	22.2x8	90.7	117.5
3"1/2	228.6	184.2	139.7	28.4	42.9	22.2x8	103.4	133.4
4"	254	200.2	157.2	30.2	46.2	22.2x8	116.1	146.1
5"	279.4	235	185.7	33.3	49.3	22.2x8	143.8	177.8
6"	317.5	269.7	215.9	35.1	50.8	22.2x12	170.7	206.2
8"	381	330.2	269.7	39.6	60.5	25.4x12	221.5	260.4
10"	444.5	387.4	323.9	46	65	28.6x16	276.4	320.5
12"	520.7	450.9	381	49.3	71.6	31.8x16	327.2	374.7
14"	584.2	514.4	412.8	52.3	74.7	31.8x20	359.2	425.5
16"	647.7	571.5	469.9	55.6	81	34.9x20	410.5	482.6
18"	711.2	628.7	533.4	58.7	87.4	34.9x24	461.8	533.4
20"	774.7	685.8	584.2	62	93.7	34.9x14	513.1	587.2
24"	914.4	812.8	692.2	68.3	104.9	41.3x24	616	701.5