


FLANGIA CIECA FORGIATA ASME B16.5 ASTM A182 150 LBS

RICAVATO DA: FORGIATO

NORMATIVA: ASME B16.5

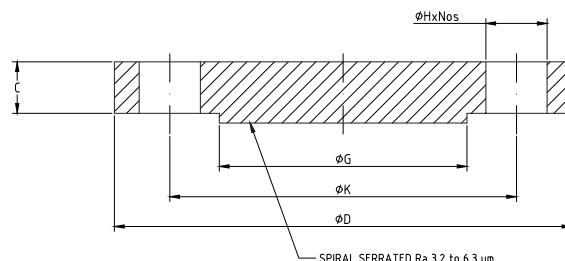

MISURA	DIAMETRO ESTERNO		PASSO DIAMETRO CIRCOLARE		DIAMETRO SUPERF. SOLLEVATA		SPESSORE		FORI x N.
	D	TOL	K	TOL	G	TOL	C	TOL	H x NOS
1/2"	88.9		60.5		35.1		9.7		15.9x4
3/4"	98.6		69.9		42.9		11.2		15.9x4
1"	108.0		79.2		50.8		12.7		15.9x4
1"1/4	117.3		88.9		63.5		14.2		15.9x4
1"1/2	127.0		98.6		73.2		15.7		15.9x4
2"	152.4		120.7		91.9		17.5		19.1x4
2"1/2	177.8		139.7		104.6		20.6		19.1x4
3"	190.5		152.4		127.0		22.4		19.1x4
3"1/2	215.9		177.8		139.7		22.4		19.1x8
4"	228.6	+1.5	190.5	+1.5	157.2	+0.8	22.4	+3.0	19.1x8
5"	254.0	-1.5	215.9	-1.5	185.7	-0.8	22.4	-0.0	22.2x8
6"	279.4		241.3		215.9		23.9		22.2x8
8"	342.9		298.5		269.7		26.9		22.2x8
10"	406.4		362.0		323.9		28.4		25.4x12
12"	482.6		431.8		381.0		30.2		25.4x12
14"	533.4		476.3		412.8		33.3		28.6x12
16"	596.9		539.8		469.9		35.1		28.6x16
18"	635.0		577.9		533.4		38.1		31.8x16
20"	698.5		635.0		584.2		41.1	+4.8	31.8x20
24"	812.8		749.3		692.2		46.0	-0.0	34.9x20