


FLANGIA CIECA FORGIATA ASME B16.5 ASTM A182 600 LBS

RICAVATO DA: FORGIATO

NORMATIVA: ASME B16.5

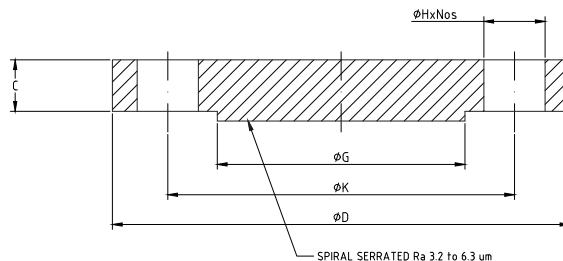

MISURA	DIAMETRO ESTERNO		PASSO DIAMETRO CIRCOLARE		DIAMETRO SUPERF. SOLLEVATA		SPESSORE		FORI x N.
	D	TOL	K	TOL	G	TOL	C	TOL	H x NOS
1/2"	95.3		66.5		35.1		14.2		15.9x4
3/4"	117.3		82.6		42.9		15.7		19.1x4
1"	124.0		88.9		50.8		17.5		19.1x4
1"1/4	133.4		98.6		63.5		20.6		19.1x4
1"1/2	155.4		114.3		73.2		22.4		22.4x4
2"	165.1		127.0		91.9		25.4		19.1x8
2"1/2	190.5		149.4		104.6		28.4		22.2x8
3"	209.6		168.1		127.0		31.8		22.2x8
3"1/2	228.6		184.2		139.7		35.1	+3.0	25.4x8
4"	273.1	+1.5	215.9	+1.5	157.2	+0.8	38.1	-0.0	25.4x8
5"	330.2	-1.5	266.7	-1.5	185.7	-0.8	44.5		28.6x8
6"	355.6		292.1		215.9		47.8		28.6x12
8"	419.1		349.3		269.7		55.6		31.8x12
10"	508.0		431.8		323.9		63.5		34.9x16
12"	558.8		489.0		381.0		66.5		34.9x20
14"	603.3		527.1		412.8		69.9		38.1x20
16"	685.8		603.3		469.9		76.2		41.3x20
18"	743.0		654.1		533.4		82.6		44.5x20
20"	812.8		723.9		584.2		88.9	+4.8	44.5x24
24"	939.8		838.2		692.2		101.6	-0.0	50.8x24