


TEE ASME B16.11 A182 3000# SW

NORMATIVA: ASME B16,11

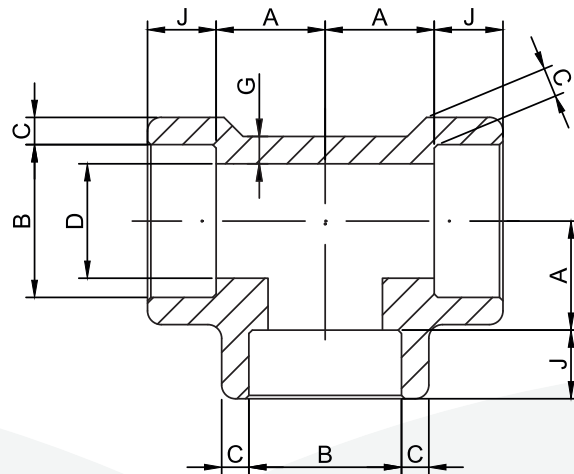

G	B mm	D mm	C-AVG mm	C-MIN mm	G mm	J mm	A mm
1/8"	11.2 10.8	7.6 6.1	3.18	3.18	2.41	9.5	11.0
1/4"	14.6 14.2	10.0 8.5	3.78	3.30	3.02	9.5	11.0
3/8"	18.0 17.6	13.3 11.8	4.01	3.50	3.20	9.5	13.5
1/2"	22.2 21.8	16.6 15.0	4.67	4.09	3.73	9.5	15.5
3/4"	27.6 27.2	21.7 20.2	4.90	4.27	3.91	12.5	19.0
1"	34.3 33.9	27.4 25.9	5.69	4.98	4.55	12.5	22.5
1 1/4"	43.1 42.7	35.8 34.3	6.07	5.28	4.85	12.5	27.0
1 1/2"	49.2 48.8	41.6 40.1	6.35	5.54	5.08	12.5	32.0
2"	61.7 61.2	53.3 51.7	6.93	6.04	5.54	16.0	38.0
2 1/2"	74.4 73.9	64.2 61.2	8.76	7.67	7.01	16.0	41.0
3"	90.3 89.8	79.4 76.4	9.52	8.30	7.62	16.0	57.0
4"	115.7 115.2	103.8 100.7	10.69	9.35	8.56	19.0	66.5